


HFD41/D41A

SUBMINIATURE SIGNAL RELAY



File No.:E133481

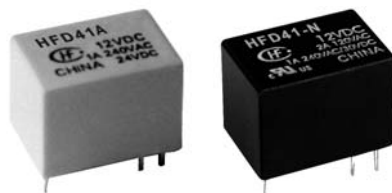

Features

- 5A switching capability
- 1 Form C configuration
- Standard PCB layout
- Wash tight and flux proofed types available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (15.7 x 11.0 x 12.0) mm

CONTACT DATA

Concat arrangement	1C
Contact resistance	100mΩ (at 1A 24VDC)
Contact material	AgNi
Contact rating (Res. load)	1A 125VAC/30VDC 1A 240VAC/30VDC 2A 125VAC, 3A 120VAC 5A 120VAC
Max. switching voltage	240VAC / 30VDC
Max. switching current	5A
Max. switching power	600VA / 30W
Mechanical endurance	1 x 10 ⁷ OPS
Electrical endurance	1 x 10 ⁵ OPS

CHARACTERISTICS

Insulation resistance		100MΩ (at 500VDC)
Dielectric strength	Between coil & contacts	1000VAC 1min
	Between open contacts	500VAC 1min
Operate time (at nomi. volt.)		10ms max.
Release time (at nomi. volt.)		5ms max.
Shock resistance	Functional	98m/s²
	Destructive	980m/s²
Vibration resistance		10Hz to 55Hz 1.5mm DA
Humidity		35% to 85% RH
Ambient temperature		-25°C to 70°C
Termination		PCB (DIP)
Unit weight		Approx. 5g
Construction		Wash tight, Flux proofed

Notes: 1) The data shown above are initial values.
2) Please find coil temperature curve in the characteristic curves below.

COIL

Coil power	B: 450mW; N: 360mW; H: 200mW
------------	------------------------------

COIL DATA

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance x (1±10%) Ω		
				H	N	B
3	2.3	0.3	3.9	45	25	20
5	3.8	0.5	6.5	120	70	56
6	4.5	0.6	7.8	180	100	80
9	6.8	0.9	11.7	400	220	180
12	9.0	1.2	15.6	700	400	320
24	18.0	2.4	31.2	2800	1600	1280

SAFETY APPROVAL RATINGS

UL/CUL	1A 125VAC/30VDC
	1A 240VAC/30VDC
	2A 125VAC
	3A 120VAC
	5A 120VAC

Notes: Only some typical ratings are listed above. If more details are required, please contact us.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2010 Rev. 1.00

ORDERING INFORMATION

Type		HFD41 HFD41A		-012	-N	G	S	F	3	(XXX)
Coil voltage		3, 5, 6, 9, 12, 24 VDC								
Coil power		H: 200mW		N: 360mW		B: 450mW				
Contact plating		G: Gold plated		Nil: No gold plated						
Construction ¹⁾		S: Wash tight		Nil: Flux proofed						
Insulation standard		F: Class F		Nil: Class B						
Contact material		3: 3A (AgCdO Gold-plated)		5: 5A (AgCdO Gold-plated)		Nil: Standard				
Customer special code										



Notes: 1) We recommend flux proofed types for a clean environment (free from contaminations like H₂S, SO₂, NO₂, dust, etc.).
We suggest to choose wash tight types and validate it in real application for an unclean environment (with contaminations like H₂S, SO₂, NO₂, dust, etc.).
If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions


HFD41

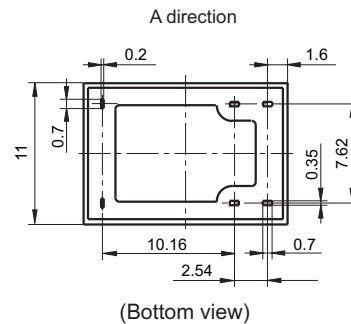

Wiring Diagram
(Bottom view)




PCB Layout
(Bottom view)



Unit: mm

HFD41A

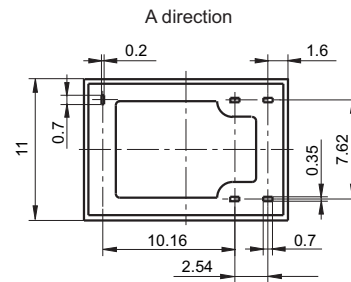

Technical drawing of a rectangular plate. The overall dimensions are 10.16 (width) and 7.62 (height). The plate features five holes, each with a diameter of 5-Ø1. The holes are arranged in two rows: three in the top row and two in the bottom row. The horizontal distance from the left edge to the center of the first hole in the top row is 10.16. The horizontal distance between the center of the first hole in the top row and the center of the first hole in the bottom row is 2.54.

